




Element: 065

Models: 1F065, 2F065, 2G065, 4G065
4H065, 6H065, 6J065

Use appropriate HP and pressure scales for the number of stages required.

NOTE: Pressure limits rated at 87 psi/stage (70 Duro.) Some models have additional limits. Please consult factory before making final selection.

	RPM	150	300	450	575
NPSH Required — (Ft.)		1.90	3.80	8.30	12.20
Minimum Recommended Motor HP	1 STG	5	10	15	20
	2 STG	7½	15	20	25
	4 STG	10	20	25	30
	6 STG	15	25	40	50
Drive End HP Must be added to HP value from curve.	F	0.38	0.76	1.10	1.50
	G	0.53	1.10	1.60	2.00
	H	0.90	1.70	2.60	3.30
	J	1.00	2.00	3.00	3.90

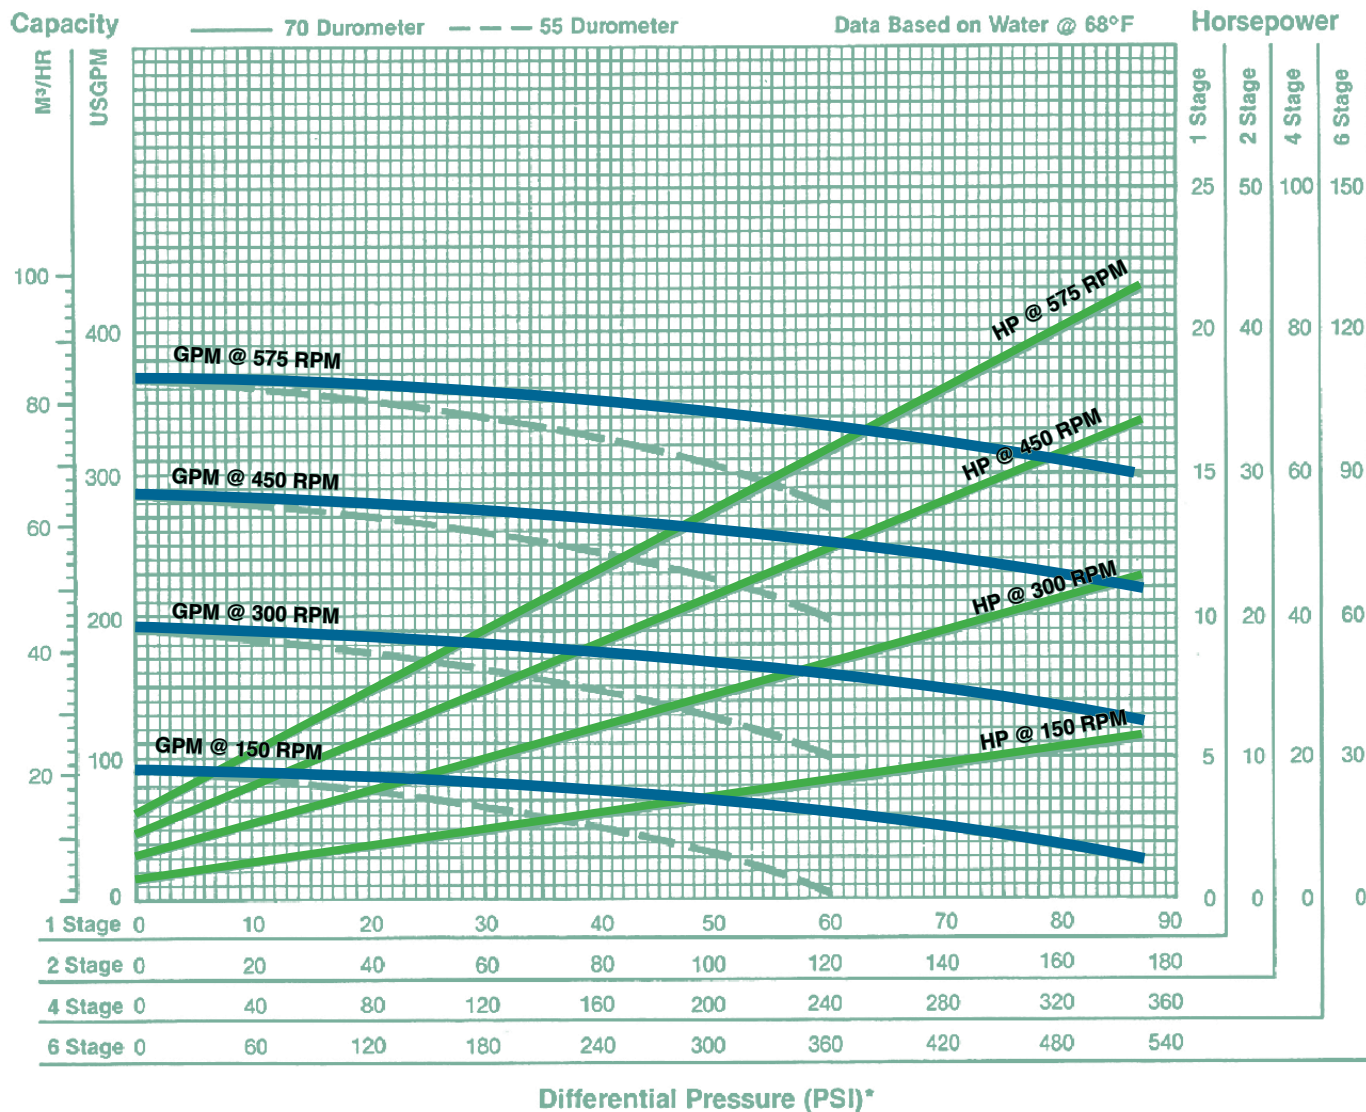

*(PSI × .069 = BAR) (PSI × .070 = kgf/cm²) (USGPM × .2271 = M³/HR) (HP × .746 = kW)

Continental Pump Company

29425 State Hwy B | Warrenton, Missouri 63383 | Tel: 636-456-6006 | Fax: 636-456-4337 | Email: sales@con-pump.com
Visit us at: www.continentalultrapumps.com