


Continental Progressive Cavity Pump CP Model CP56 Packed Seal Pump




Continental Pump Company

29425 State Hwy B | Warrenton, Missouri 63383| Tel: 636-456-6006 | Fax: 636-456-4337| Email: sales@con-pump.com Visit us at: www.continentalultrapumps.com

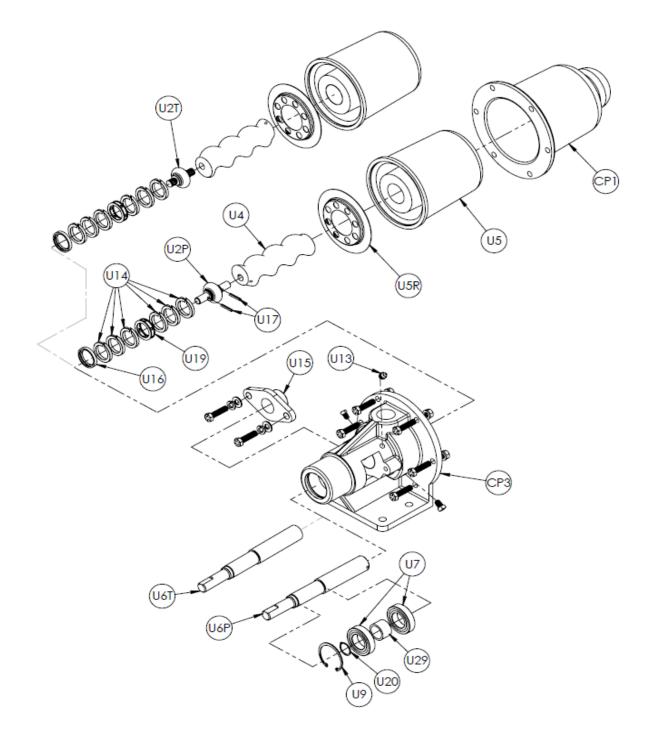

CP Model Number Nomenclature:

Materials used in the pumps are based on the fluid to be handled and are indicated in the model number nomenclature.



- (1): Indicates the pump model designation (CP, CPM, CPML Model)
- (2): Indicates the pump frame size designation
- (3): Indicates the pump body casting material
- (4): Indicates the rotor material
- (5): Indicates the stator material
- (6): Indicates seal type: Mechanical Seal or Packed Seal (For Mechanical use M, for Packed use D)
- (7): Indicates if the Drive Shaft, Flex Joint, and Rotor is Pinned or Threaded. (For pinned use P, for threaded use T)
- (8): Indicates if the pump has vertical suction housing. If horizontal is preferred no designation will be used.

Material	of Construction	
	1	_

Continental Part Description	Continental Letter Designation	Part Materials
Pump Body	С	Cast Iron
	S	316 Stainless Steel (CF8M)
Rotor	D	Chrome Plated Alloy Steel
	S	Chrome Plated Stainless Steel
Stator	Q	Buna Nitrile
	В	EPDM
	F	Viton®
Seal Type	М	Mechanical Seal
	D	Packing Gland

Mechanical Seal and Packed Seal options are available for all frame sizes (15, 22, 33, 44, 56, and 67).

The Pinned Drive Shaft, Flex Joint, and Rotor option is also available for all frame sizes. The Threaded option is available only in frame sizes 15, 22, 33, 44, and 56; Size 67 has pinned option only.

Continental Pump Company



CP Pump

Replacement Parts for CP56 Packed Seal Pump

Part	Part Name	Continental Pump Part Number	For Continental Pump Model
0	Suction Body	CP1-56C CP1-56S	CP56
	Suction Body, Vertical with 1/4" NPT Pipe Plug	CPV1-56C CPV1-56S	CP56
	Discharge Housing for Packed Seal with 1/8" NPT Drain Plug (Plug Sold Seperately)	CP3-56DC CP3-56DS	CP56
	Flexible Joint, Pinned	U2-56PQS U2-56PBS U2-56PFS	CP56
	Flexible Joint, Threaded	U2-56TQS U2-56TBS U2-56TFS	CP56
	Rotor, Pinned & Threaded	U4-56PTS	CP56
6	Stator	U5-56Q U5-56B U5-56F	CP56
	Stator Barrier (Optional)	U5R-56S	CP56
	Shaft, Pinned	U6-56PDS	CP56

Continental Pump Company

29425 State Hwy B | Warrenton, Missouri 63383| Tel: 636-456-6006 | Fax: 636-456-4337| Email: sales@con-pump.com Visit us at: www.continentalultrapumps.com



Part	Part Name	Continental Pump Part Number	For Continental Pump Model
	Shaft, Threaded	U6-56TDS	CP56
0	Ball Bearing (2 Required)	U7-56	CP56
C	Retaining Ring	U9-56	CP56
	1/4" NPT Pipe Plug for Vertical Suction Body	U11-56C U11-56S	CP56
	1/8" NPT Drain Plug for Discharge Housing (Sold individually or in Bolt Kit)	U12-56C U12-56S	CP56
2	1/8" NPT Non Vented Grease Fitting	U13-56/67C	CP56
500	Packing Set, Teflon Coated	U14-56FC	CP56
6	Packing Gland	U15-56/67DC U15-56/67DS	CP56
0	Packing Gland Insert	U16-56/67S	CP56
11	Roll Pins (for Pinned Pump Only, 2 Required)	U17-56S	CP56
Ô	Lantern Ring	U19-56/67S	CP56
0	Shaft Retaining Ring	U20-56	CP56
0	Bearing Spacer	U29-56	CP56

Continental Pump Company 29425 State Hwy B | Warrenton, Missouri 63383| Tel: 636-456-6006 | Fax: 636-456-4337| Email: sales@con-pump.com Visit us at: www.continentalultrapumps.com



CP Pump

Replacement Kits for CP56 Packed Seal Pump

Part	Part Name	Continental Pump Part Number	For Continental Pump Model
000000000000000000000000000000000000000	Pinned Rebuild <u>Kit</u> : Includes: QTY 1: Flex Joint, Rotor, Stator, Packing Set; Qty 2: Roll Pins	CPD56K-PQS CPD56K-PBS CPD56K-PFS	CP56
CONSIGNATION OF	Threaded Rebuild <u>Kit</u> : Includes: QTY 1: Flex Joint, Rotor, Stator, Packing Set.	CPD56K-TQS CPD56K-TBS CPD56K-TFS	CP56
and and and a state of the second state of the	Bolt Kit: Includes Qty 6: Housing Bolts, Washers & Nuts. Qty 2: Packing Gland Bolts & Washers. Qty 1: 1/8" NPT Drain Plug, 1/8" NPT Plug & 1/8" NPT Non- Vented Grease Fitting	U10-56DC	CP56

Continental Pump Company



Materials of Construction

All Continental Pump casting materials are Class 40# grey cast iron and CF8M (316) stainless steel. The best metal for your application would depend on how corrosive your liquid is. We offer an epoxy coating for an additional charge and can be applied to the suction housing and discharge. The epoxy seals the cast iron from the material being pumped.

Stators are available in 3 types of elastomers. The rubber materials are: Buna Nitrile, EPDM and Viton[®]. The rubber that is best for your application depends on what liquid you are pumping and at what temperature, as it plays a vital role in which to select.

The rotors are available in Chrome Plated Stainless Steel.

Abrasive Resistance Mechanical Seals are a great upgrade for your more abrasive applications. By adding a <u>Stator Barrier</u>, which is recommended in any negative suction and/or vacuum application to help protect the stator. There are lots of variables to take in consideration to know if this is right for your application. Contact us with your application information to see if this is for you.

Looking for simplicity? We offer complete Progressive Cavity Pump Units. They are constructed on a steel base to fit your specific application needs. The Unit consists of a Pump, a Steel Base & Guard, a Gear Reducer and Motor. Also available are Belt Drive Units, Gas or Diesel Engines, and many other base options.

Space Challenged? If you are needing a different arrangement from traditional piping, we have vertical suction housings available in the CP Model.

Don't need a complete pumping unit but looking for drive options? We can still help, whether attached to a pump or sold separately we can supply you with VFD's, Motors and Bases.

Continental Pump Company